


AXLE LEAF SPRINGS


AXLES AND SUSPENSION

Double Leaf Springs

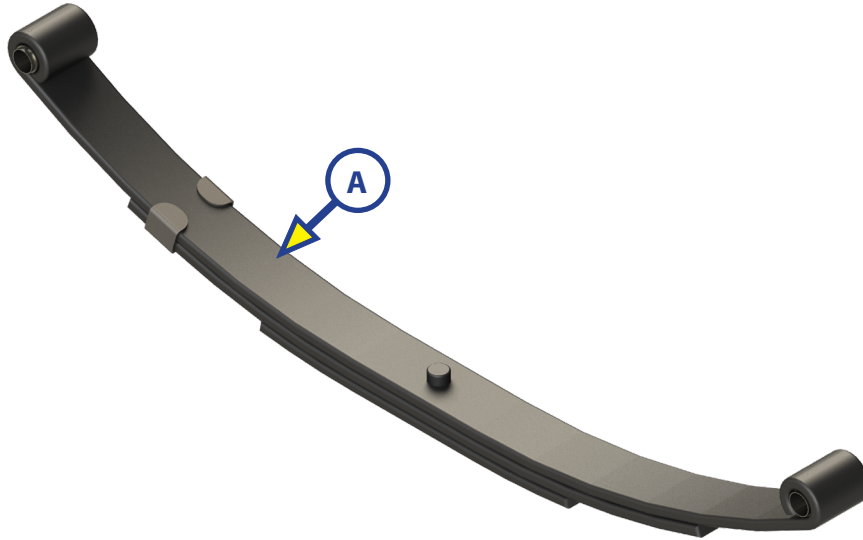

Callout	Part #	Capacity	Loaded Length	# of Leaves	Eye to Eye Length	Stacked Leaf Thickness	Loaded Arch Length
A	127094	1000 lb	21	3	20 ³ / ₈ +/- ¹ / ₈	0.786 +/- .015	2.12
B	127103	1250 lb	24	3	23 ¹ / ₈ +/- ¹ / ₈	0.937 +/- .015	2.50
C	125269	1400 lb	21	4	25 ¹ / ₂ +/- ¹ / ₈	1.164 +/- .020	2.38
D	125215	1750 lb	24	3	23 ¹ / ₈ +/- ¹ / ₈	1.080 +/- .015	2.50
E	124903	1750 lb	26	4	25 ¹ / ₄ +/- ¹ / ₈	1.272 +/- .020	1.50
F	125799	2000 lb	24	4	23 ¹ / ₈ +/- ¹ / ₈	1.366 +/- .020	2.50
G	125797	2000 lb	26	3	25 ¹ / ₄ +/- ¹ / ₈	1.162 +/- .017	1.75
H	129745	2200 lb	26	4	25 ¹ / ₄ +/- ¹ / ₈	1.440 +/- .032	2.00
I	133982	2500 lb	24	4	23 ¹ / ₈ +/- ¹ / ₈	1.440 +/- .020	2.50
J	702095	2600 lb	26	4	25 ¹ / ₄ +/- ¹ / ₈	1.522 +/- .022	1.75
K	702096	3000 lb	26	4	25 ¹ / ₄ +/- ¹ / ₈	1.563 +/- .020	1.75
L	679372	3500 lb	26	6	24 ⁷ / ₈ +/- ¹ / ₈	2.049 +/- .030	1.75
M	679373	4000 lb	26	7	24 ⁷ / ₈ +/- ¹ / ₈	2.520 +/- .035	1.75

Slipper Springs

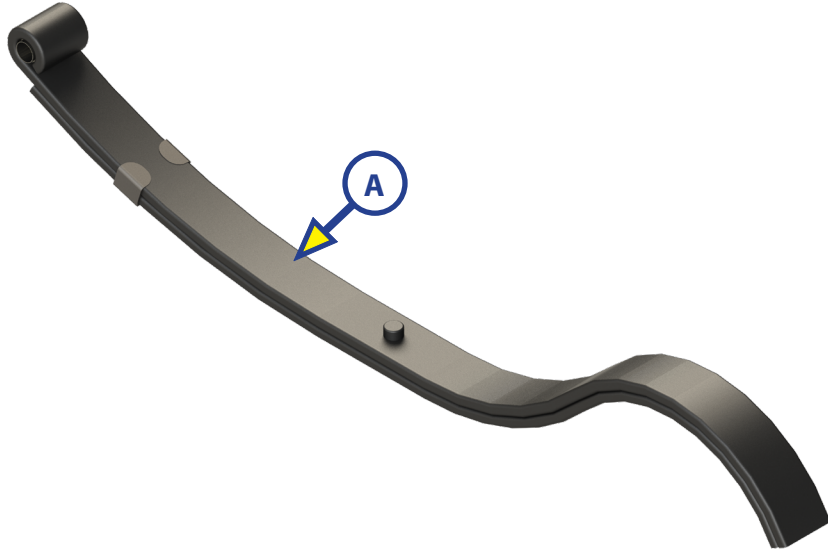

Callout	Part #	Capacity	Loaded Length	# of Leaves	Eye to Eye Length	Stacked Leaf Thickness	Loaded Arch Length
A	132819	1000 lb	25	2	24 ¾ +/- ⅛	0.683 +/- .010	4.00
B	136527	2000 lb	25	4	26.50	1.329 +/- .020	2.00
C	125250	2500 lb	25	4	26.50	1.440 +/- .020	2.00
D	125203	3500 lb	25	5	26.50	1.800 +/- .025	2.00
E	710494	4000 lb	25	7	26.50	2.52	2.00
F	176326	5000 lb	30	5	30	2.143	2.70