FURRION®

30” BUILT-IN ELECTRIC FIREPLACE

FF30SW15A



FF30SW15A-BL



FF30SW15A-SS

WORKS WITH UNIMOTE

VIBRATIONSMART™

CLIMATESMART™

OVERHEATING SAFETY CUT-OFF

SLIDE-OUT SAFETY CUT-OFF

TEMPERATURE CONTROL SETTINGS


HEAT UP TO 500sq.ft


SIMULATED WOOD WITH 4-LEVEL LED FLAME TECHNOLOGY


TIMER


- Flame effect technology: traditional flame
- 4 flame brightness settings
- Black tempered glass front panel
- LED control board
- Temperature control
- Slide-out safety cut-off: close proximity sensor switches power off automatically
- Adjustable temperature settings from 65°F to 95°F
- Timer setting up to 5 hours
- Remote control included

FF30SW15A | 30” BUILT-IN ELECTRIC FIREPLACE

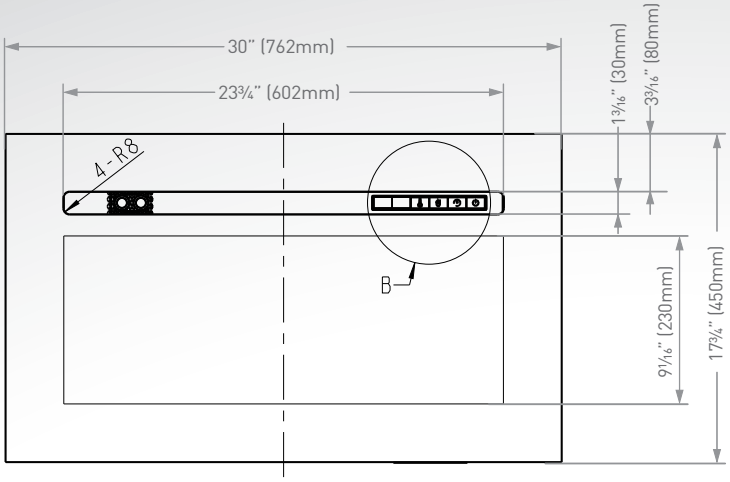

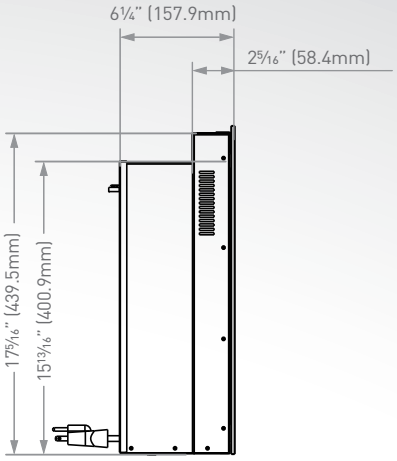

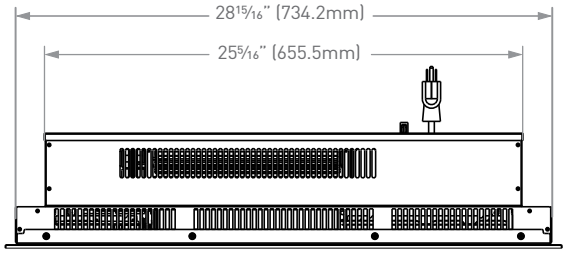

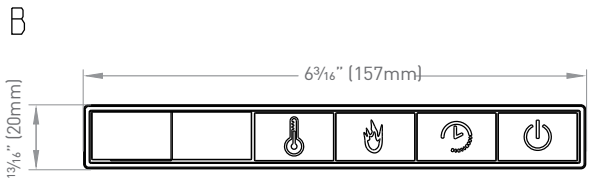

Specifications

Rated Voltage	AC 120V/60Hz
Heating Output	750W/1500W
LED Control Board	√
Timer	√
Log Fuel Effect	√
Remote Type	IR

Dimensions

Product Size (W x H x D)	29¹⁵⁄₁₆” x 17¾” x 6¼” (760 x 450 x 158mm)

Packaging Information

Packaging Type	Brown Carton Box
Quantity Per Box (pcs)	1
Individual Packaging Dimensions (W x H x D)	31¾” x 19½” x 8” (805 x 495 x 202mm)
Individual Packaging Gross Weight (kg/lbs)	16.8/37
Individual Packaging Net Weight (kg/lbs)	14.5/32

Box Container Qty

20' - Box Container Qty	344
40' - Box Container Qty	688
40'H - Box Container Qty	790

Customer Service & Technical Support: Email: support@furrion.com Tel : (888) 354 5792 www.furrion.com

Furrion® and the Furrion logo are trademarks licensed for use by Furrion Ltd. and registered in the U.S. and other countries. © 2007-2022 Furrion Ltd.

Rev: 05.24.2023

MS-FF30SW15A-V.1.5

FURRION

34” BUILT-IN ELECTRIC FIREPLACE

FF34SW15A



FF34SW15A-BL



FF34SW15A-SS

WORKS WITH UNIMOTE

VIBRATIONSMART™

CLIMATESMART™

OVERHEATING SAFETY CUT-OFF

SLIDE-OUT SAFETY CUT-OFF

TEMPERATURE CONTROL SETTINGS


HEAT UP TO 500sq.ft


SIMULATED WOOD WITH 4-LEVEL LED FLAME TECHNOLOGY


TIMER

- Flame effect technology: traditional flame
- 4 flame brightness settings
- Black tempered glass front panel
- LED control board
- Temperature control
- Slide-out safety cut-off: close proximity sensor switches power off automatically
- Adjustable temperature settings from 65°F to 95°F
- Timer setting up to 5 hours
- Remote control included

FF34SW15A | 34” BUILT-IN ELECTRIC FIREPLACE

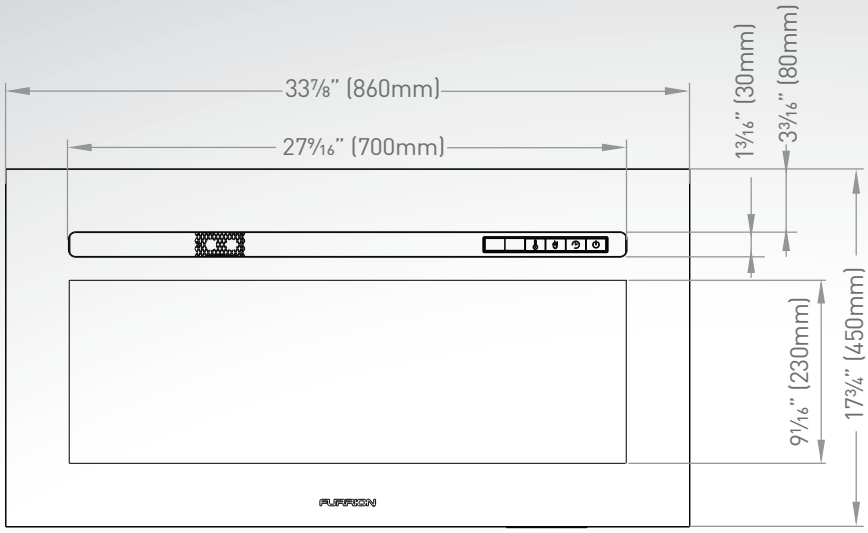

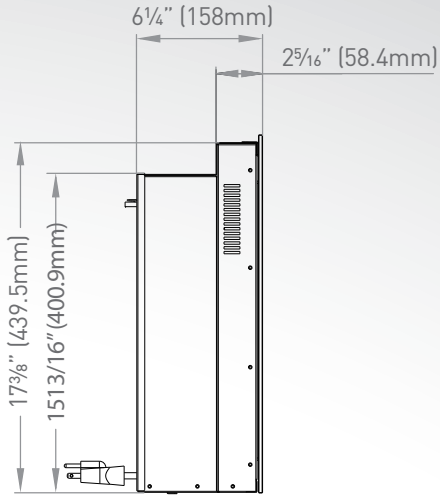

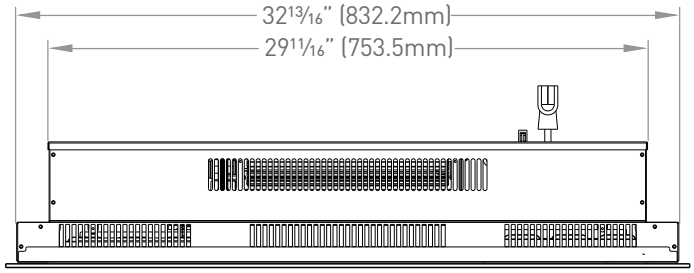

Specifications

Rated Voltage	AC 120V/60Hz
Heating Output	750W/1500W
LED Control Board	√
Timer	√
Log Fuel Effect	√
Remote Type	IR

Dimensions

Product Size (W x H x D)	33⅞” x 17¾” x 6¼” (860 x 450 x 158mm)

Packaging Information

Packaging Type	Brown Carton Box
Quantity Per Box (pcs)	1
Individual Packaging Dimensions (W x H x D)	35¹¹⁄₁₆” x 19½” x 8” (905 x 495 x 202mm)
Individual Packaging Gross Weight (kg/lbs)	20/44.1
Individual Packaging Net Weight (kg/lbs)	17/37.5

Box Container Qty

20' - Box Container Qty	300
40' - Box Container Qty	600
40'H - Box Container Qty	680

Customer Service & Technical Support: Email: support@furrion.com Tel : (888) 354 5792 www.furrion.com

Furrion® and the Furrion logo are trademarks licensed for use by Furrion Ltd. and registered in the U.S. and other countries. © 2007-2022 Furrion Ltd.

Rev: 05.24.2023

MS-FF34SW15A-V.1.4

FURRION

40” BUILT-IN ELECTRIC FIREPLACE

FF40SW15A-BL



WORKS WITH UNIMOTE

VIBRATIONSMART™

CLIMATESMART™

OVERHEATING SAFETY CUT-OFF

SLIDE-OUT SAFETY CUT-OFF

TEMPERATURE CONTROL SETTINGS


HEAT UP TO 500sq.ft


SIMULATED WOOD WITH 4-LEVEL LED FLAME TECHNOLOGY


TIMER

- Flame effect technology: traditional flame
- 4 flame brightness settings
- Black tempered glass front panel
- LED control board
- Temperature control
- Slide-out safety cut-off: close proximity sensor switches power off automatically
- Adjustable temperature settings from 65°F to 95°F
- Timer setting up to 5 hours
- Remote control included

FF40SW15A-BL | 40” BUILT-IN ELECTRIC FIREPLACE

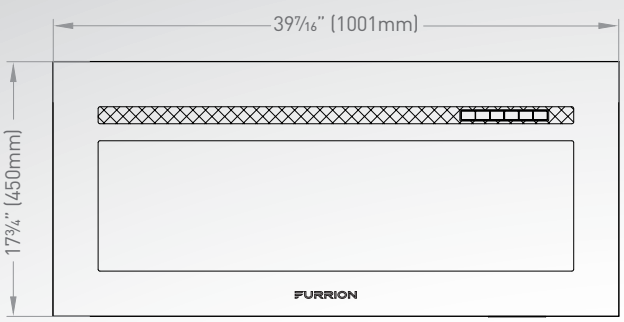

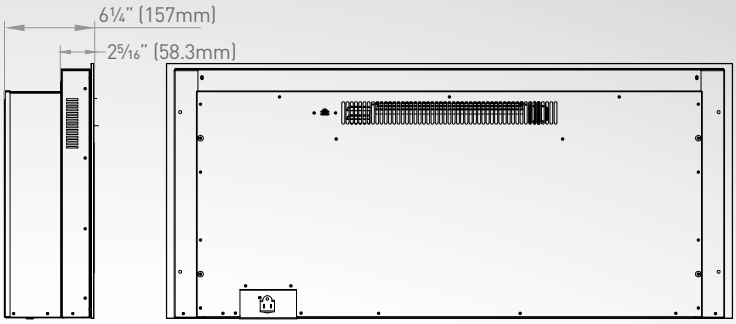

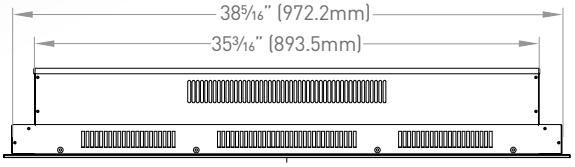

Specifications	
Rated Voltage	AC 120V/60Hz
Heating Output	750W/1500W
LED Control Board	√
Timer	√
Log Fuel Effect	√
Remote Type	IR

Dimensions	
Product Size (W x H x D)	39⁷⁄₁₆” x 17¹⁵⁄₁₆” x 6¼” (1001 x 450 x 157.5mm)

Packaging Information	
Packaging Type	Brown Box
Quantity Per Box (pcs)	1
Individual Packaging Dimensions (W x H x D)	49¹³⁄₁₆” x 19½” x 8” (1045 x 495 x 202 mm)
Individual Packaging Gross Weight (kg/lbs)	22 / 48.5
Individual Packaging Net Weight (kg/lbs)	20 / 44.1

Container Load Information	
40'HQ Container Load (pcs)	615

Customer Service & Technical Support: Email: support@furrion.com Tel : (888) 354 5792 www.furrion.com

Furrion® and the Furrion logo are trademarks licensed for use by Furrion Ltd. and registered in the U.S. and other countries. © 2007-2022 Furrion Ltd.

Rev: 05.24.2023

MS-FF40SW15A-BL-V.2.6

FURRION

60” BUILT-IN ELECTRIC FIREPLACE

FF60SW15A



FF60SW15A-BL



FF60SW15A-SS

WORKS WITH UNIMOTE

VIBRATIONSMART™

CLIMATESMART™

OVERHEATING SAFETY CUT-OFF

SLIDE-OUT SAFETY CUT-OFF

TEMPERATURE CONTROL SETTINGS


HEAT UP TO 500sq.ft


SIMULATED WOOD WITH 4-LEVEL LED FLAME TECHNOLOGY


TIMER

- Flame effect technology: traditional flame
- 4 flame brightness settings
- Black tempered glass front panel
- LED control board
- Temperature control
- Slide-out safety cut-off: close proximity sensor switches power off automatically
- Adjustable temperature settings from 65°F to 95°F
- Timer setting up to 5 hours
- Remote control included

FF60SW15A | 60” BUILT-IN ELECTRIC FIREPLACE

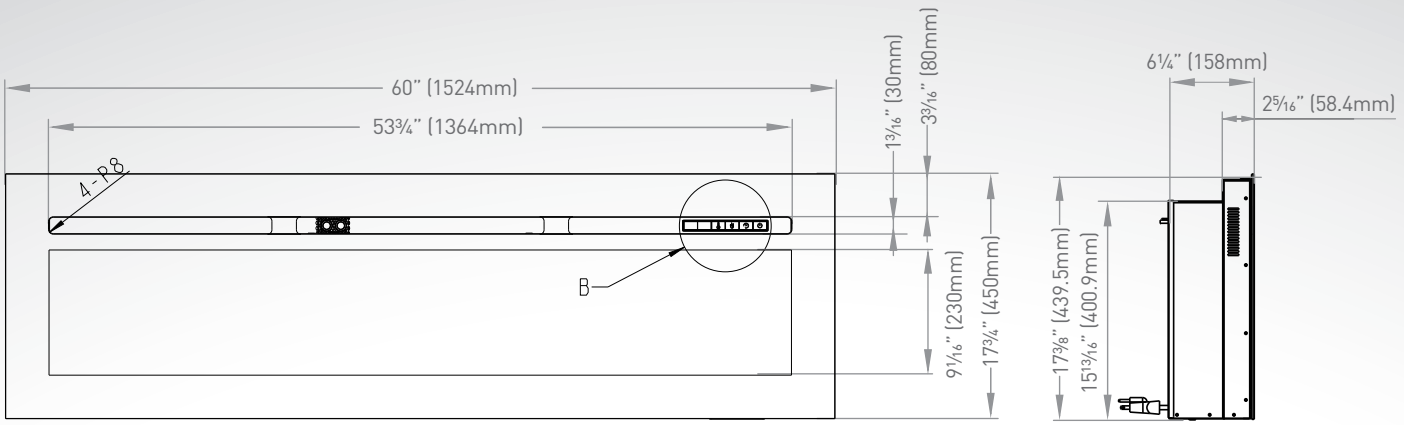

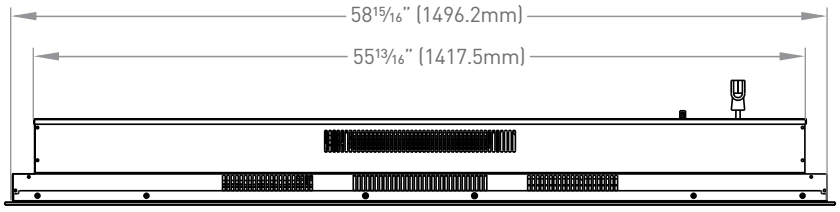

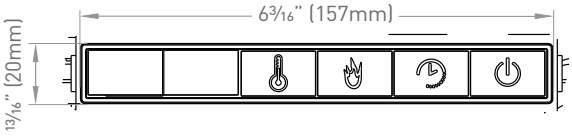

Specifications	
Rated Voltage	AC 120V/60Hz
Heating Output	750W/1500W
LED Control Board	√
Timer	√
Log Fuel Effect	√
Remote Type	IR

Dimensions	
Product Size (Wx H x D)	60” x 17¾” x 6¼” (1524 x 450 x 158mm)

Packaging Information	
Packaging Type	Brown Carton Box
Quantity Per Box (pcs)	1
Individual Packaging Dimensions (W x H x D)	62⅜” x 22¹³⁄₁₆” x 8” (1583 x 577 x 202mm)
Individual Packaging Gross Weight (kg/lbs)	29/64
Individual Packaging Net Weight (kg/lbs)	27/59.6

Container Load Information	
45' HQ Container Load (pcs)	460

* Note: “√”=Equipped

Customer Service & Technical Support: Email: support@furrion.com Tel : (888) 354 5792 www.furrion.com

Furrion® and the Furrion logo are trademarks licensed for use by Furrion Ltd. and registered in the U.S. and other countries. © 2007-2022 Furrion Ltd.