



On-the-Go™ 12.5 and 14.5 Foot Ladder

(Designed for use with On-the-Go™ Prepped Receiver)

Installation and Owner's Manual

(For Aftermarket Applications)

On-the-Go™ Ladder Aftermarket Kits

Kit #	Description
2021097938	On-the-Go Ladder - 12.5
2021126697	On-the-Go Ladder - 14.5

NOTE: Aftermarket kits contain ladder with attached mounting hanger and warning labels.

This ladder is designed to be used with an Original Equipment Manufacturers (OEM)-installed receiver ONLY.

Installation of any receiver in the Aftermarket will void the warranty and may cause death, serious personal injury, severe product and/or property damage.

Table of Contents

Introduction	2
Safety	2
Parts List	2
Operation	3
Overview	3
Extending and Retracting the Ladder	4
Installing Ladder on Receiver	5
Essential Ladder Operation Safety	5
Storage and Maintenance	6
Notes	6



Introduction

The On-the-Go Ladder is a fully-adjustable and collapsible ladder with safety locks at each rung for extra security. The Ladder is designed to be used only with the OEM-installed On-the-Go Receiver.

Additional information about this product can be obtained from lci1.com/support or by using the LippertNOW app. Replacement kits can be ordered from <https://store.lci1.com/> or by using the LippertNOW app.

The LippertNOW app is available for free on the Apple App Store® for iPhone® and iPad® and also on Google Play™ for Android™ users.

Apple App Store®, iPhone®, and iPad® are registered trademarks of Apple Inc.

Google Play™ and Android™ are trademarks of Google Inc.

Safety

Read and fully understand all instructions before installing or operating this product.

Adhere to all safety labels.

DANGER

THE “DANGER” SYMBOL ABOVE IS A SIGN THAT IMPROPER OPERATION HAS A SAFETY RISK INVOLVED AND MAY CAUSE DEATH, SERIOUS PERSONAL INJURY, SEVERE PRODUCT AND/OR PROPERTY DAMAGE IF NOT PERFORMED SAFELY AND WITHIN THE PARAMETERS SET FORTH IN THIS MANUAL.

WARNING

THE “WARNING” SYMBOL ABOVE IS A SIGN THAT AN INSTALLATION PROCEDURE HAS A SAFETY RISK INVOLVED AND MAY CAUSE DEATH, SERIOUS PERSONAL INJURY, SEVERE PRODUCT AND/OR PROPERTY DAMAGE IF NOT PERFORMED SAFELY AND WITHIN THE PARAMETERS SET FORTH IN THIS MANUAL.

On-the-Go™ 12.5 and 14.5 Foot Ladder

(Designed for use with the On-the-Go™ Prepped Receiver)

Installation and Owner's Manual

(For Aftermarket Applications)

CAUTION

THE “CAUTION” SYMBOL ABOVE IS A SIGN THAT A PROCEDURE HAS A SAFETY RISK INVOLVED AND MAY CAUSE PERSONAL INJURY, PRODUCT AND/OR PROPERTY DAMAGE IF NOT PERFORMED SAFELY AND WITHIN THE PARAMETERS SET FORTH IN THIS MANUAL.

Parts List



On-the-Go™ Ladder Prepped Kit —2021097938

Letter	PN	Description	Qty
A	2021097937	12.5 ft Ladder assembly with attached mounting hanger and warning labels	1

On-the-Go™ Ladder Prepped Kit —2021126697

Letter	PN	Description	Qty
A	N/A	14.5 ft. Ladder assembly with attached mounting hanger and warning labels	1

NOTE: Part numbers are shown for identification purposes only. Not all parts are available for individual sale. All parts with a link to the Lippert Store can be purchased.



On-the-Go™ 12.5 and 14.5 Foot Ladder

(Designed for use with the On-the-Go™ Prepped Receiver)

Installation and Owner's Manual

(For Aftermarket Applications)

Operation

WARNING

REMOVE AND STOW THE LADDER PRIOR TO TRAVEL. FAILURE TO PROPERLY REMOVE AND STOW THE LADDER COULD RESULT IN PERSONAL INJURY OR PROPERTY DAMAGE.

Overview

Each ladder rung is extended and retracted via telescoping rails held in place by locks and operated by sliding the lock buttons (Fig.1).



Fig.1

Sliding the button away from the rail disengages the lock. Sliding the button towards the rail engages the lock (Fig.2).

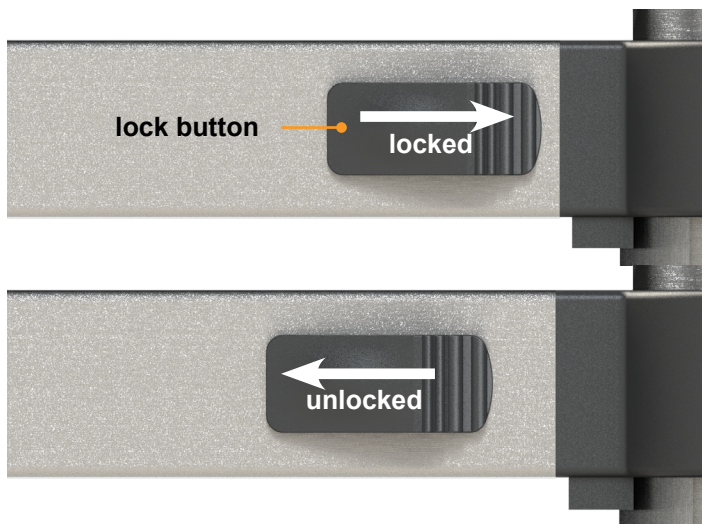


Fig.2

The ladder can be fully retracted when the ladder is being stored, or fully extended during use if the full height of the ladder is required (Fig.3).

NOTE: The ladder can be used under a partial extension in the event that the full ladder height is not needed. Care should be taken to ensure that rung spacing is even to avoid potential for tripping, or else group unused rungs at either the top or the bottom of the ladder.

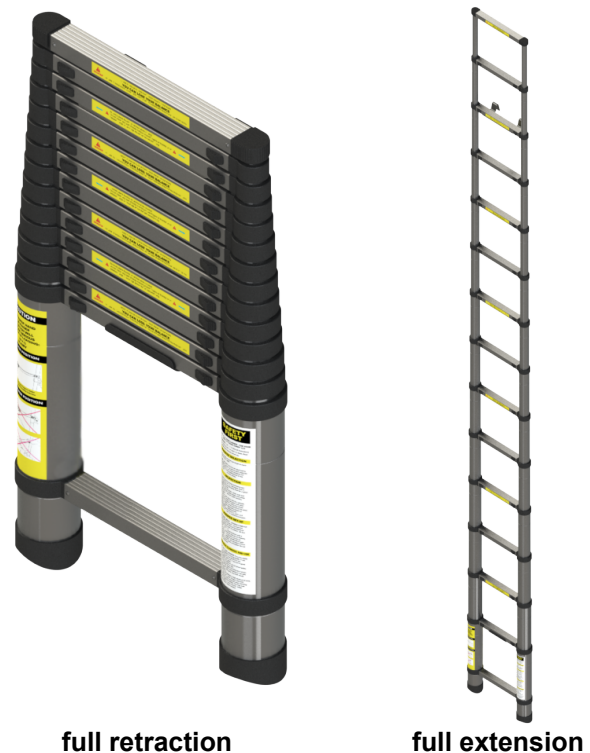


Fig.3



On-the-Go™ 12.5 and 14.5 Foot Ladder

(Designed for use with the On-the-Go™ Prepped Receiver)

Installation and Owner's Manual

(For Aftermarket Applications)

Extending and Retracting the Ladder

1. Disengage both lock buttons on the rung (Fig.4).



Fig.4

2. Fully extend or retract the rung (Fig.5).

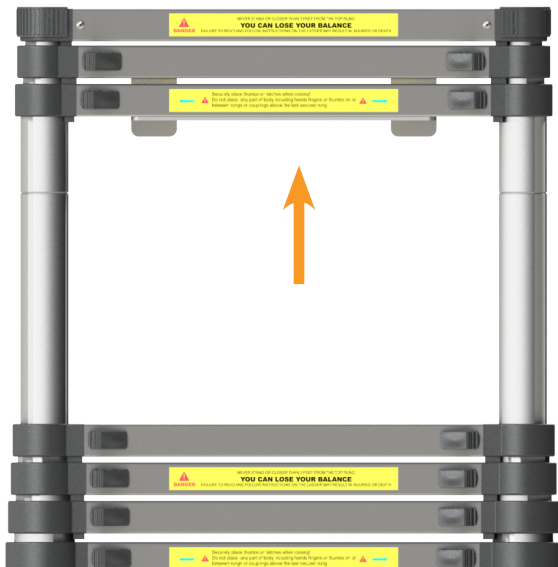


Fig.5

3. Engage the lock buttons (Fig.6).

NOTE: Lock buttons cannot be engaged if the rung is not fully extended or retracted.

⚠ WARNING

MAKE SURE ALL LOCK BUTTONS ARE IN THE "LOCK" POSITION PRIOR TO ASCENT OR DESCENT. UNLOCKED LOCK BUTTONS MAY CAUSE INSTABILITY AND COULD LEAD TO A FALL.

⚠ CAUTION

MOVING PARTS CAN PINCH, CUT, AND CRUSH. KEEP HANDS OFF MOVING PARTS AT ALL TIMES AND EXERCISE CAUTION WHEN EXTENDING OR RETRACTING THE LADDER.



Fig.6



On-the-Go™ 12.5 and 14.5 Foot Ladder

(Designed for use with the On-the-Go™ Prepped Receiver)
Installation and Owner's Manual
(For Aftermarket Applications)

Essential Ladder Operation Safety

Installing Ladder on Receiver

1. Extend the ladder to full height.
2. Insert the attached mounting hanger of the ladder into the slots on the receiver (Fig.7).

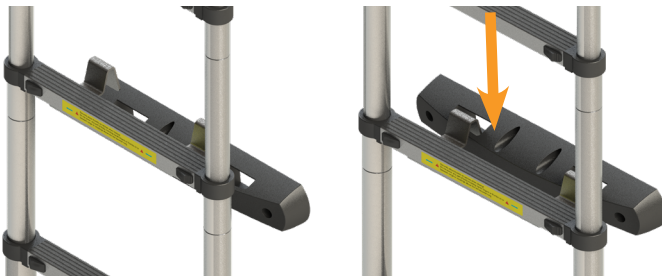


Fig.7

3. Pull down on ladder to make sure the mounting hanger is fully inserted into the receiver.
4. Put feet of the ladder on the ground. Ladder should be at an angle. The optimal angle for use of the ladder is approximately 75 degrees (Fig.8). Retract rungs starting from the bottom if angle needs adjustment.

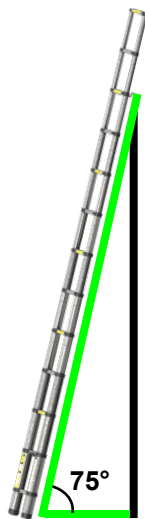


Fig.8

CAUTION

MAKE SURE LADDER IS FULLY SEATED IN THE RECEIVER BEFORE USE. IF ALL THE LADDER TREADS ARE NOT FULLY EXTENDED, USE CAUTION ASCENDING AND DESCENDING AS LADDER RUNG SPACING WILL NOT BE AS UNIFORM AS EXPECTED.

DANGER

FALLS FROM A LADDER FROM ANY HEIGHT CAN LEAD TO DEATH OR SERIOUS PHYSICAL INJURY. OBEY SAFETY MEASURES AND DO NOT USE THE LADDER FOR ANYTHING OTHER THAN ITS INTENDED USE.

- Do not exceed the 330 lb. (150 kg) maximum weight capacity of the ladder.
- Only 1 person at any given time should be on the ladder.
- Ensure all lock buttons are in the "lock" position prior to using ladder (Fig.6).
- Position the ladder only on level, stable ground that will not shift or sink under use.
- Do not overreach. Keep torso between the side rails at all times.
- Always face the ladder when ascending or descending.
- Equipment carried up and down the ladder should be manageable and easy to handle.



On-the-Go™ 12.5 and 14.5 Foot Ladder

**(Designed for use with the
On-the-Go™ Prepped Receiver)**

Installation and Owner's Manual

(For Aftermarket Applications)

Storage and Maintenance

The ladder comes with a Velcro strap (**Fig.9**) for storage when the ladder is not in use.



Fig.9

Regularly inspect the receiver and ladder for any signs of wear over time that may affect the safety or the stability of either component.

Notes

[illegible]



This image shows a single sheet of white paper with horizontal blue or grey ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.



On-the-Go™ 12.5 and 14.5 Foot Ladder

(Designed for use with the On-the-Go™ Prepped Receiver)
Installation and Owner's Manual
(For Aftermarket Applications)

Notes



Manual information may be distributed as a complete document only, unless Lippert Components provides explicit consent to distribute individual parts.

All manual information is subject to change without notice. Revised editions will be available for free download at lippert.com. Manual information is considered factual until made obsolete by a revised version.

Please recycle all obsolete materials and contact Lippert Components with concerns or questions.