
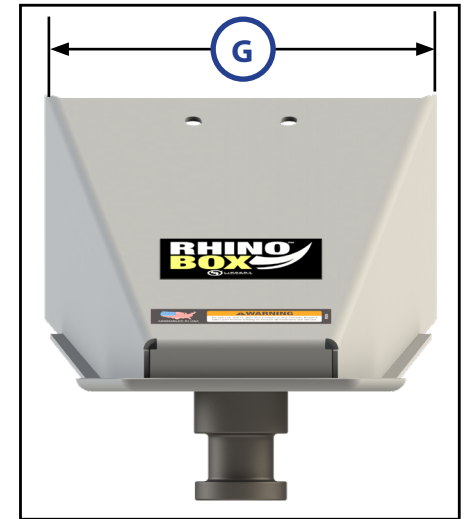


TOWING

Follow These Steps to Determine the Pin Box Replacement Model:

1. Look for the white sticker with a 4-digit number on it (ex. 1621 or 1716).
2. What is the gross vehicle weight rating (GVWR) of the unit?
3. Visually compare illustration to the mounting wing on the 5th wheel.
4. Measure length of box (front row of bolts to center of kingpin E).
5. Measure bolt pattern (both dimensions A and B).
6. Measure box width (G).

NOTE: Write in the measurements of the Pin Box in the Actual Dimensions area of the chart.

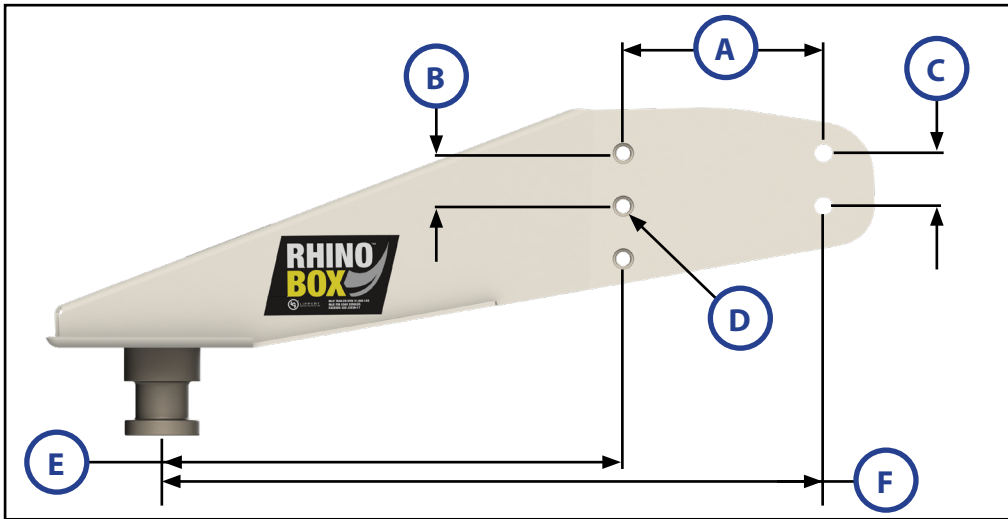

Description	Standard Pin Box	Elongated Pin Box
OEM Part No.	719277	852275
Lippert Model	2020044233	2020044404
Bolt Pattern	2-row	2-row
Horizontal Distance Between Bolt Pattern	(A) 7 1/2"	7 1/2"
Vertical Distance Between Front Bolt Pattern	(B) 2"	2"
Vertical Distance Between Rear Bolt Pattern	(C) 2"	2"
Bolt Size	(D) 5/8"	5/8"
Bolt Size Head	15/16"	15/16"
Front Row Bolts to Kingpin Center	(E) 13-1/4"	17 1/4"
Rear Row Bolts to Kingpin Center	(F) 20-3/4"	24 3/4"
Box Width	(G) 12"	12"

As a supplier of a broad array of highly-engineered components in the recreation and transportation product markets, safety, education and customer satisfaction are our primary concerns. Should you have any questions, please do not hesitate to contact us at 432-LIPPERT (432-547-7378) or by email at customerservice@lci1.com. Self-help tips, technical documents, product videos and a training class schedule are available at lippert.com or by downloading the LippertNOW app.