




SLIDE-OUTS

Purpose

This document is for identification purposes only for the location of necessary seals and pans for the F.A.S.T. (Fast Assembly Self Tensioning) Track® Flush Floor Slide-out system. The seals are a Boyd Corporation product and must be ordered directly from Boyd Corporation at <https://www.boydcorp.com/sealing/rv-slide-out-seals.html> or 1 (888) 244-6931.

Callout	Description	Boyd Part Number	Location	Picture
A	Integrated wear bar/ramp	3198	On the trailer floor in the recessed area for the slide-out room (Fig. 1).	
B	Dual durometer top and bottom wipe seal with EK bulb receiver	3249	Top inside/outside and bottom outside of slide-out opening (Fig. 2).	
C	Black rubber slide-on D-seal	2004	The perimeter of the outside and inside of the slide-out room (Fig. 3).	
D	Injection molded left-hand notched corner pan	3259	Bottom left-hand side of the slide-out room opening (Fig. 4).	
E	Injection molded Right-hand notched corner pan	3260	Bottom right-hand side of the slide-out room opening (Fig. 5).	

SLIDE-OUTS

NOTE: Some parts have been lightened so they are easier to view. All indicated parts are black rubber or plastic.

Fig. 1

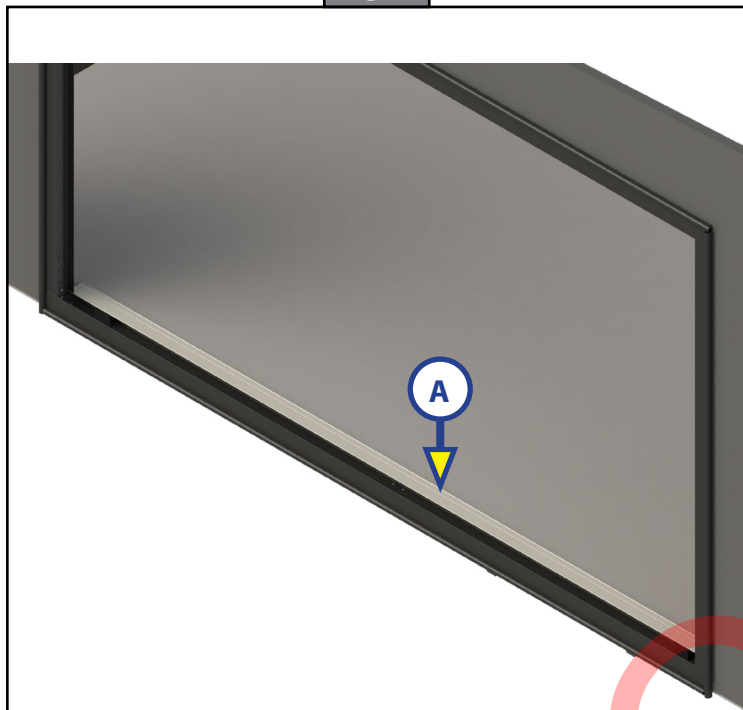


Fig. 2


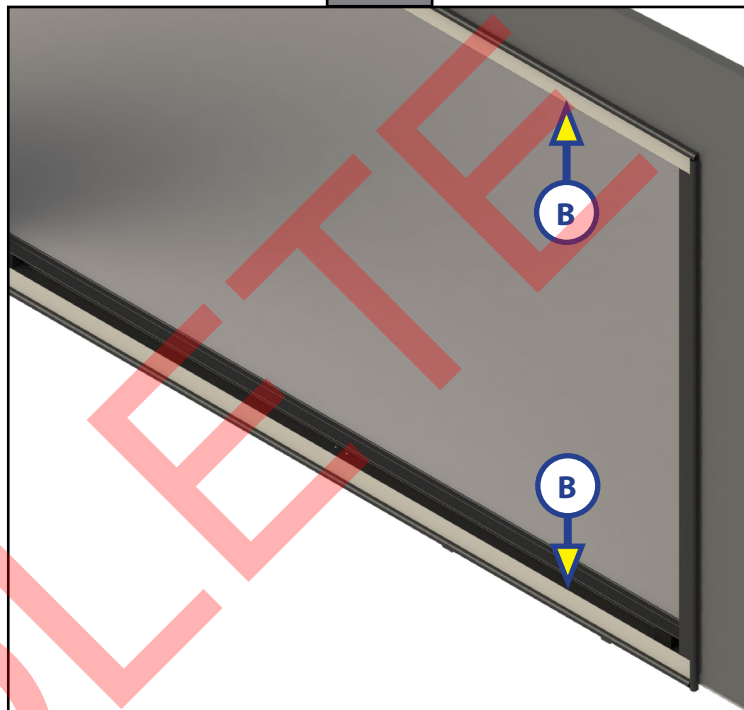


Fig. 3

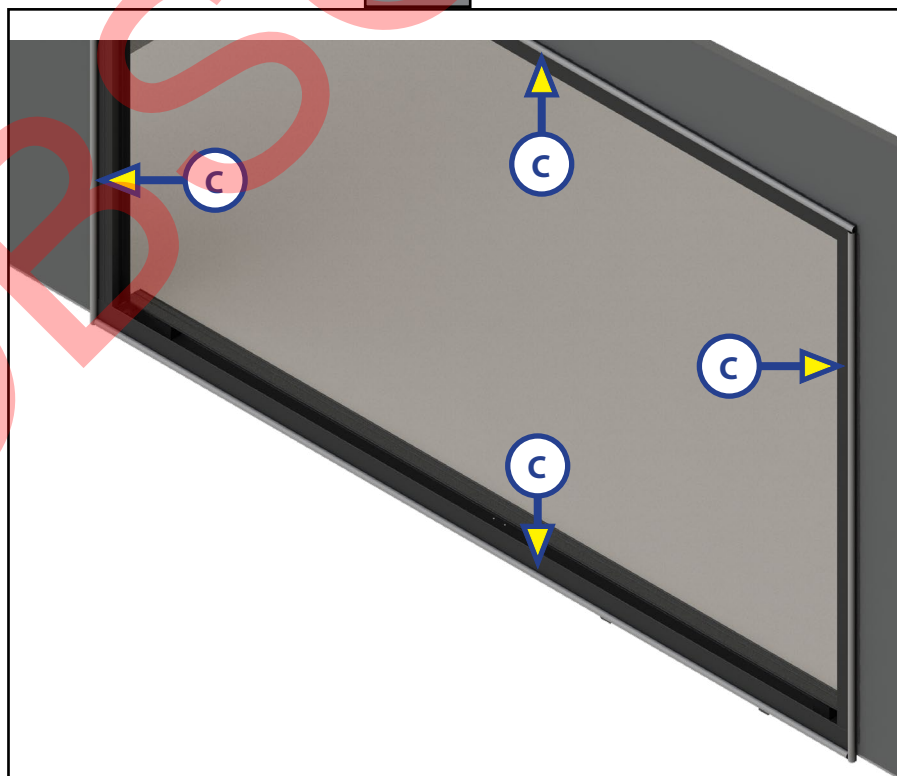

SLIDE-OUTS

Fig. 4


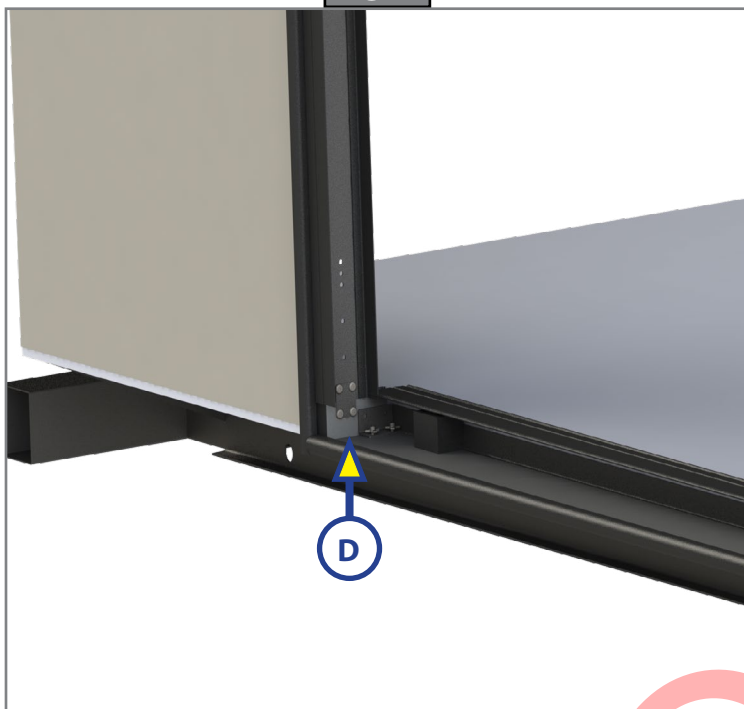


Fig. 5

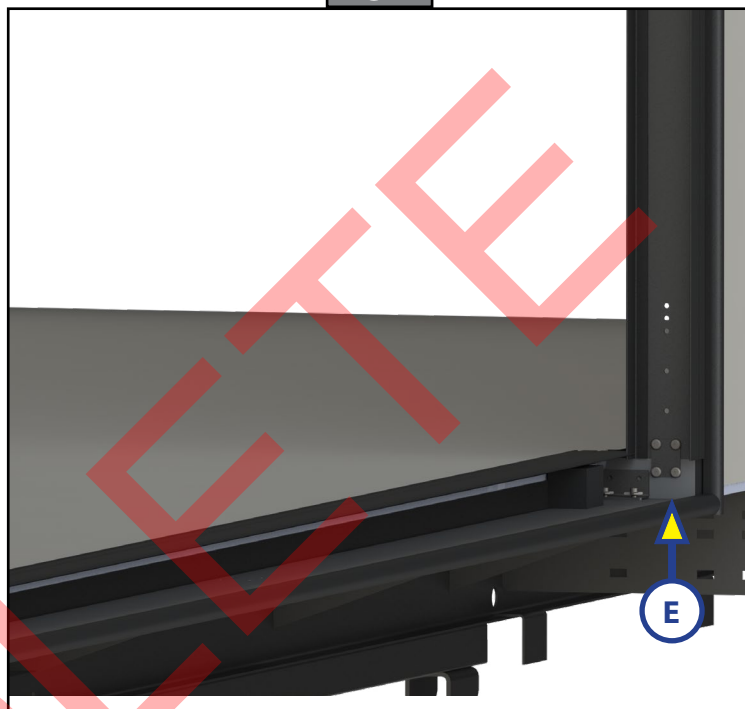

As a supplier of components to the RV industry, safety, education and customer satisfaction are our primary concerns. Should you have any questions, please do not hesitate to contact us at (574) 537-8900 or by email at customerservice@lci1.com. Self-help tips, technical documents, product videos and a training class schedule are available at lci1.com or by downloading the MyLCI app.