


**SLIDE-OUTS**

**SlimRack® Slide-out Room Slide Rating Chart**

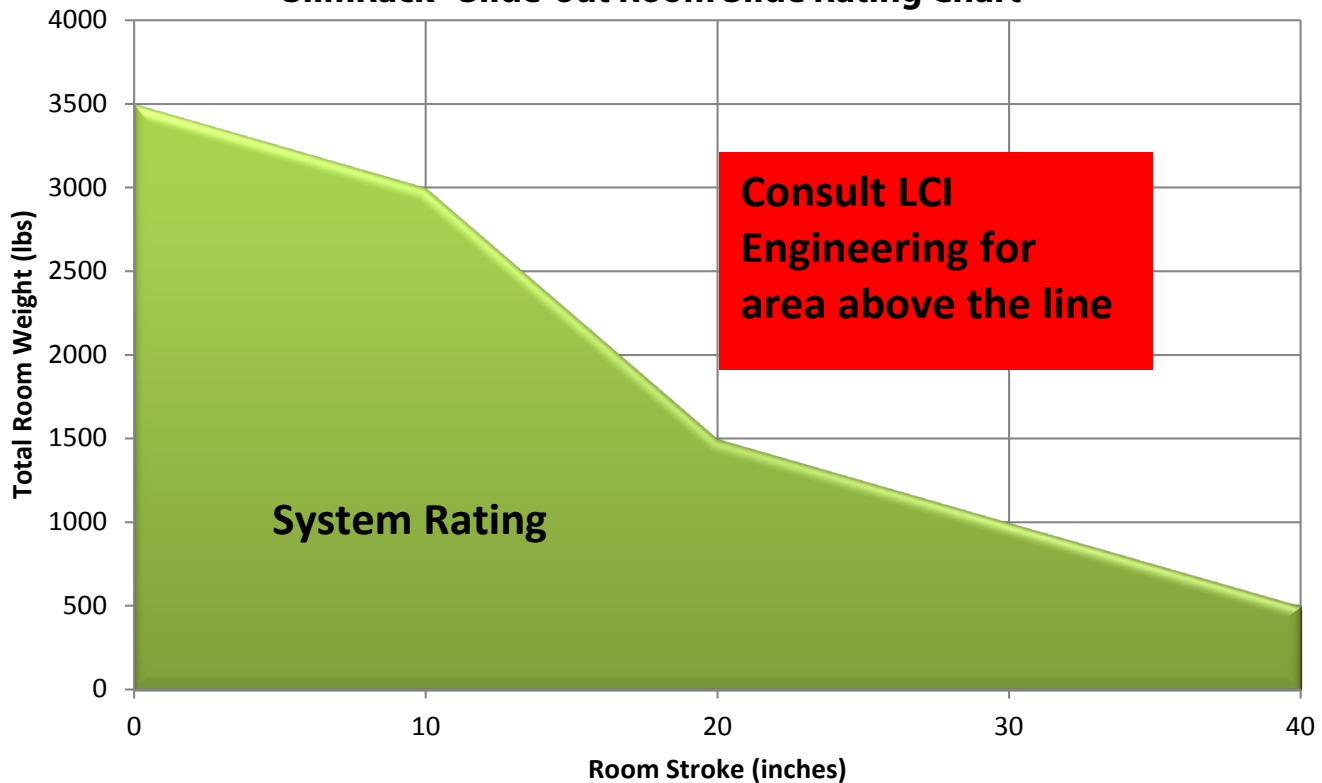

## Specifications

1. Opening Gap: 5 3/4" ± 1/4" (3 7/8" from room wall to outside edge of flange)
2. Rack Alignment: Nominal rack to rack ± 1/8"
3. Room/Opening: Square within opening gap
4. Maximum column height = 97.0"
5. Fasteners:
  - A. Mounting Brackets and flange to sidewall: #10 button/pan head 40-50 in-lbs.
6. Sync Value/Tolerance:
  - A. Side to side sync within 3/16" during travel
  - B. Stops repeatable within ± 0.06"
7. Mechanically locked room position
8. Temperature Range:
  - A. Operation: 120°F to -30°F
  - B. Storage: 120°F to -40°F
9. Salt Spray on exposed components:
  - A. 500 hours per ASTM-B117 and ASTM-D1654
10. Water Test Standard:
  - A. Zero infiltration at full extension and retraction per MIL-STD-810G
11. Amp Draw (at 68°F)
  - A. No load: 5A
  - B. Stall: 30A
  - C. Nominal: 8A (typical application)
12. Voltage Requirements:
  - A. 10.5VDC Minimum
  - B. 12.5VDC Nominal
  - C. 15VDC Maximum
13. Actuation Speed: 1" per second
14. Control Inputs:
  - A. Power In: 2 Pin Molex Mini-Fit SR 42819-2212 (42816-0212 mating connector)
  - B. Park Brake: 2 Pin Molex Mini-Fit JR 39-29-9022

As a supplier of components to the RV industry, safety, education and customer satisfaction are our primary concerns. Should you have any questions, please do not hesitate to contact us at (574) 537-8900 or by email at [customerservice@lci1.com](mailto:customerservice@lci1.com). Self-help tips, technical documents, product videos and a training class schedule are available at [lci1.com](http://lci1.com) or by downloading the MyLCI app.